


Factory Certified UL and CSA NGRs

UL and CSA Ratings up to 8 kV L-N available



Meets all Requirements of IEEE 32 and IEC

Post Glover Neutral Grounding Resistor in NEMA 3R Enclosure

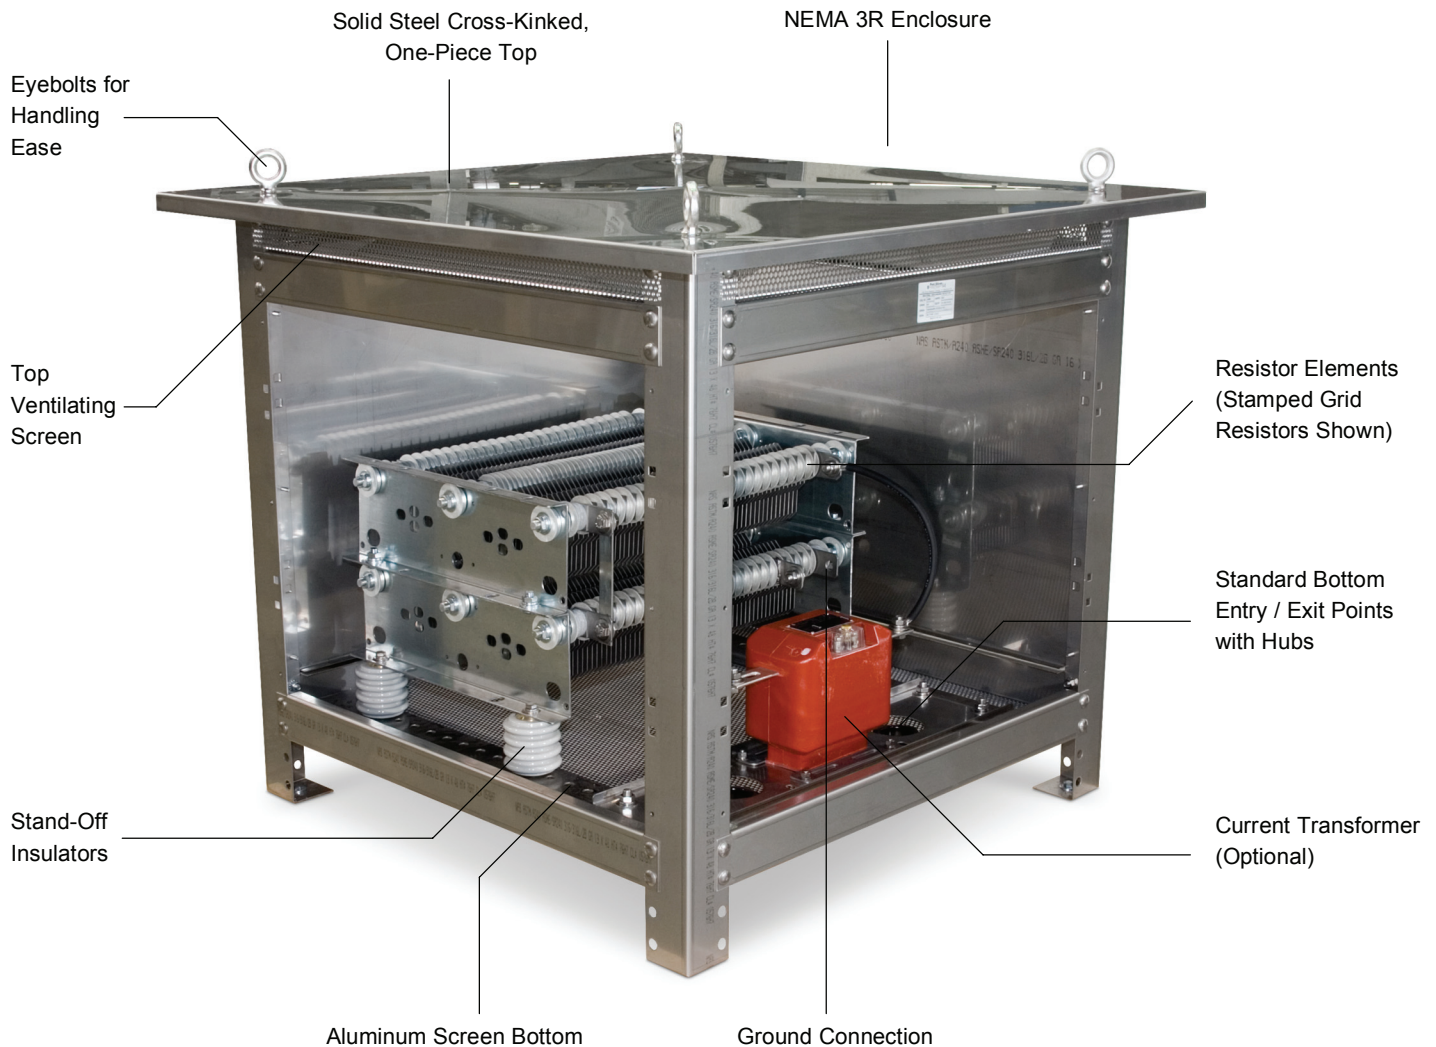

Optional Features

- Top- or Side-Mounted Exit & Entrance Bushing(s)
- Powder Coat Finish
- Stainless Steel Enclosure
- Elevating Stand
- Current Transformer
- Disconnect Switch

Resistor Element Options

- Stainless Steel Stamped Grid
- Stainless Steel Edgewound
- Stainless Steel Wirewound

324 Governor Road • Braeside, Victoria 3195 • AUS
 Phone: +61 (0)3 9587 4099 • Fax: +61 (0)3 9587 4130
www.postgloverasia.com

4750 Olympic Blvd. • Erlanger, KY 41018 • USA
 Phone: 800-537-6144 / 859-283-0778 • Fax: 859-283-2978
www.postglover.com

Quality System Certified to ISO 9001



Post Glover

"The Resistor Specialists"



Serving the Electrical Industry Since 1892

Factory Certified UL and CSA NGRs

Quick-Quote form for Low Resistance Neutral Grounding

Customer name: _____ Phone: _____
Quote requested by: _____ Fax: _____
Quote due: _____ Email: _____

Voltage, line-to-line: _____ volts Voltage, line-to-neutral: _____ volts
Current: _____ amps

Maximum duty: 10 seconds (standard) 60 seconds Continuous
 Other, please specify: _____

Enclosure: None Outdoor

Enclosure finish: Mill galvanized (standard) Stainless Steel, 304 Painted galvanized steel, ANSI-61 Gray
 Stainless Steel, 316 Painted galvanized steel, other Specify color: _____

Neutral connection: Bottom cable entry (standard) Top-mounted bushing Side-mounted bushing

Ground connection: Bottom cable entry (standard) Top-mounted bushing Side-mounted bushing

Accessories: Elevating stand Height: _____ Current transformer Ratio: _____ Shorting terminal block in junction box for CT

Other requirements:

